

## Positioning feet with external thread and carbide diamond grip, style K

### Item description/product images

---



### Description

**Material:**  
Steel.


**Version:**  
Case-hardened and black oxidized.

**Note:**  
Positioning feet are used as supports, stops and thrust pads for fixtures and general machine and appliance construction.

Positioning feet with external thread and carbide diamond grip, style K

Drawings

(K)

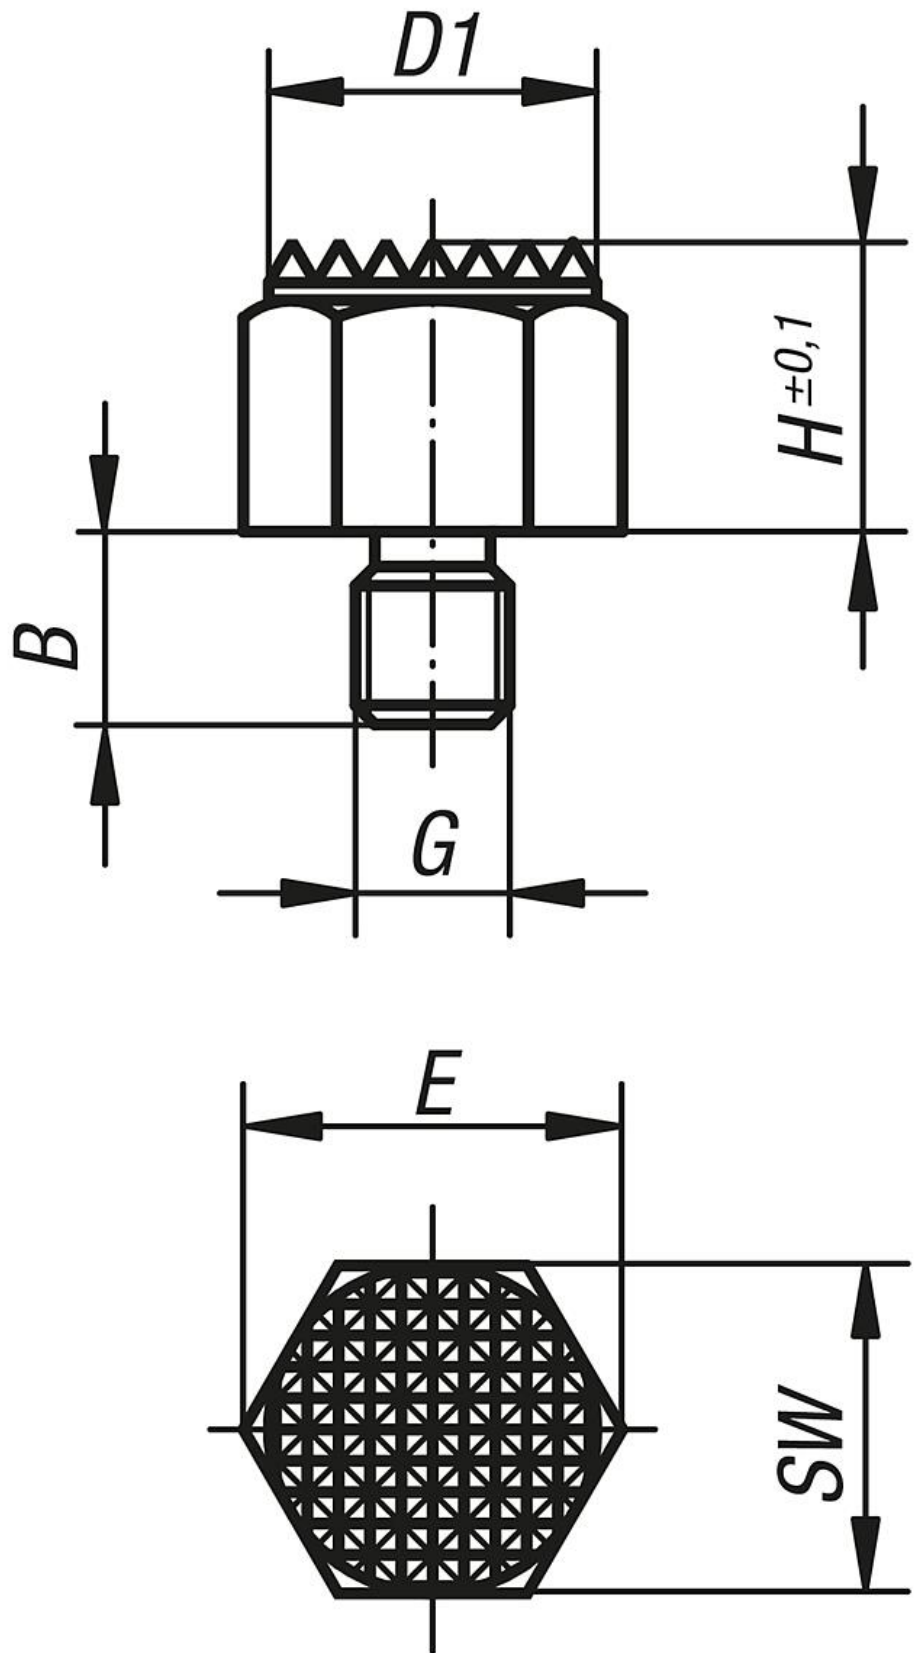

**Positioning feet with external thread and carbide diamond grip, style K**

Item No.	style	B	D1	G	H	E	SW	Tightening torque max. Nm
<b>K0298.7101</b>	K	10	17	M8	10	19,4	17	18
<b>K0298.7201</b>	K	19	30	M16	20	33	30	140
<b>K0298.710</b>	K	14	22	M12	10	25,2	22	60
<b>K0298.715</b>	K	14	22	M12	15	25,2	22	60
<b>K0298.7151</b>	K	19	30	M16	15	33	30	140