

Spiders, play-free for elastomer dog couplings

Item description/product images



Description

Material:
Polyurethane.

Version:
Coupling spider blue Shore 80A.
Coupling spider yellow Shore 92A.
Coupling spider red Shore 98A.


Note:
The spiders are the compensating elements in elastomer dog couplings. As the main component of a coupling, they determine its properties.

The spiders are available in various hardness grades. As the hardness of the coupling spider increases, the torque and stiffness transmitted increases, and as the hardness decreases, the displacement capacity and cushioning increases.

Pre-tensioning of the spiders in the coupling hubs make this variant play-free.

Temperature range:
Blue Shore 80A: -50 °C to +80 °C. Briefly -60 °C to +120 °C.
Yellow Shore 92A: -30 °C to +90 °C. Briefly -50 °C to +120 °C.
Red Shore 98A: -30 °C to +90 °C. Briefly -40 °C to +120 °C.

Drawings

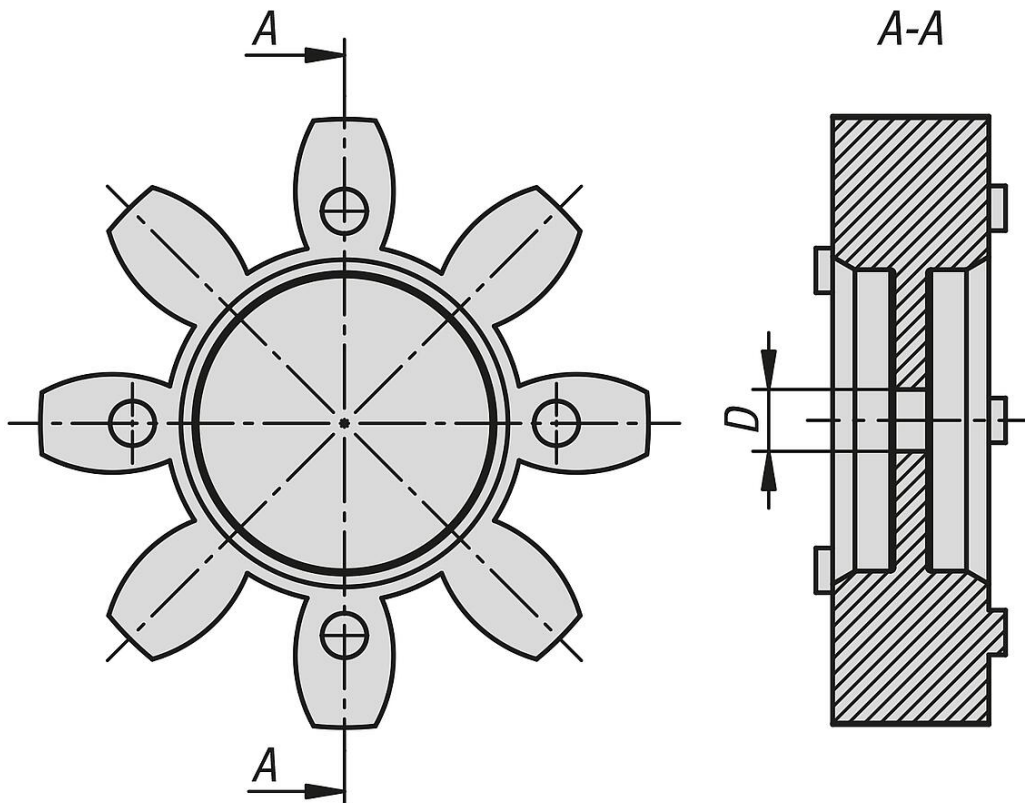

Spiders, play-free for elastomer dog couplings

Spiders, play-free, for elastomer dog couplings

Item No.	Size	Main color	Torsional stiffness static (Nm/wheel)	Torsional stiffness dynamic Nm/wheel	Spring stiffness radial (N/mm)	max. shaft offset radial (mm)
K1896.0780	7	blue	8,6	26	114	0,15
K1896.0980	9	blue	17,2	52	125	0,2
K1896.1280	12	blue	84,3	252	274	0,2
K1896.1480	14	blue	60,2	180	153	0,21
K1896.1980	19	blue	618	1065	582	0,15
K1896.2480	24	blue	860	1390	840	0,2
K1896.2880	28	blue	1370	2350	990	0,2
K1896.0592	5	Yellow	5,16	16	154	0,06
K1896.0792	7	Yellow	14,3	43	219	0,10
K1896.0992	9	Yellow	31,5	95	262	0,15
K1896.1292	12	Yellow	160,4	487	470	0,14
K1896.1492	14	Yellow	114,6	344	336	0,15
K1896.1992	19	Yellow	1090	1815	1120	0,1
K1896.2492	24	Yellow	2300	5130	1900	0,15
K1896.2892	28	Yellow	4080	6745	1780	0,15
K1896.3892	38	Yellow	11800	21850	4400	0,12
K1896.4292	42	Yellow	10870	20500	4100	0,19
K1896.4892	48	Yellow	12968	22800	4500	0,23
K1896.0798	7	red	22,9	69	421	0,10
K1896.0998	9	red	51,6	155	518	0,1
K1896.1298	12	red	240,7	718	846	0,08
K1896.1498	14	red	171,9	513	654	0,09
K1896.1998	19	red	1512	2540	2010	0,06
K1896.2498	24	red	3700	8130	2940	0,11
K1896.2898	28	red	6410	9920	3200	0,11
K1896.3898	38	red	26300	40335	6474	0,09
K1896.4298	42	red	21594	37692	5940	0,14
K1896.4898	48	red	25759	49400	6820	0,16

Item No.	max. shaft offset axial (mm)	max. angular offset (°)	Max. torque Nm	Coupling spider hardness	Nom. torque Nm	D max.
K1896.0780	+0,6 / -0,3	1,1	1.4	80 Shore A	0.7	3
K1896.0980	+0,8 / -0,4	1,1	3,6	80 Shore A	1,8	7
K1896.1280	+0,9 / -0,4	1,1	6	80 Shore A	3	8
K1896.1480	+1 / -0,5	1,1	8	80 Shore A	4	10
K1896.1980	+1,2 / -0,5	1,1	12	80 Shore A	6	18
K1896.2480	+1,4 / -0,5	1	34	80 Shore A	17	27
K1896.2880	+1,5 / -0,7	1,3	92	80 Shore A	46	30
K1896.0592	+0,4 / -0,2	1	0,6	92 Shore A	0,5	3
K1896.0792	+0,6 / -0,3	1	2.4	92 Shore A	1.2	3
K1896.0992	+0,8 / -0,4	1	6	92 Shore A	3	7
K1896.1292	+0,9 / -0,4	1	10	92 Shore A	5	8
K1896.1492	+1 / -0,5	1	15	92 Shore A	7,5	10
K1896.1992	+1,2 / -0,5	1	24	92 Shore A	12	18
K1896.2492	+1,4 / -0,5	1	70	92 Shore A	35	27
K1896.2892	+1,5 / -0,7	1	190	92 Shore A	95	30
K1896.3892	+1,8 / -0,7	0,9	650	92 Shore A	325	38
K1896.4292	+2 / -1	1	530	92 Shore A	265	46
K1896.4892	+2,1 / -1	1	620	92 Shore A	310	51
K1896.0798	+0,6 / -0,3	1	4	98 Shore A	2	3
K1896.0998	+0,8 / -0,4	0,9	10	98 Shore A	5	7
K1896.1298	+0,9 / -0,4	0,9	18	98 Shore A	9	8
K1896.1498	+1 / -0,5	0,9	25	98 Shore A	12,5	10
K1896.1998	+1,2 / -0,5	0,9	42	98 Shore A	21	18
K1896.2498	+1,4 / -0,5	0,9	120	98 Shore A	60	27
K1896.2898	+1,5 / -0,7	0,9	320	98 Shore A	160	30
K1896.3898	+1,8 / -0,7	0,8	810	98 Shore A	405	38
K1896.4298	+2 / -1	0,9	900	98 Shore A	450	46

Spiders, play-free for elastomer dog couplings

Item No.	max. shaft offset axial (mm)	max. angular offset (°)	Max. torque Nm	Coupling spider hardness	Nom. torque Nm	D max.
K1896.4898	+2,1 / -1	0,9	1050	98 Shore A	525	51