

Cam levers, steel, adjustable with external thread, plastic thrust washer and steel stud - inch

Item description/product images

INCH
Parts



Description

Material:

Handle steel 1.0401.
Thrust washer plastic PA 66 GF 35-X fiberglass reinforced.
Hinge pin stainless steel 1.4305 (AISI 303 equivalent).
Stud and washer steel, grade 5.8.

Version:

Handle, stud and washer trivalent blue passivated.
Thrust washer black.
Hinge pin bright.


Note:

Adjustable cam levers are used if the position of the lever relative to the axis of tension only permits one specific position (interference circle). The exact position of the lever is adjusted using a screwdriver on the fine thread setscrew.
Plastics are subject to creeping under load (retardation).

Drawing reference:

1) setscrew for fine adjustment of lever

Drawings

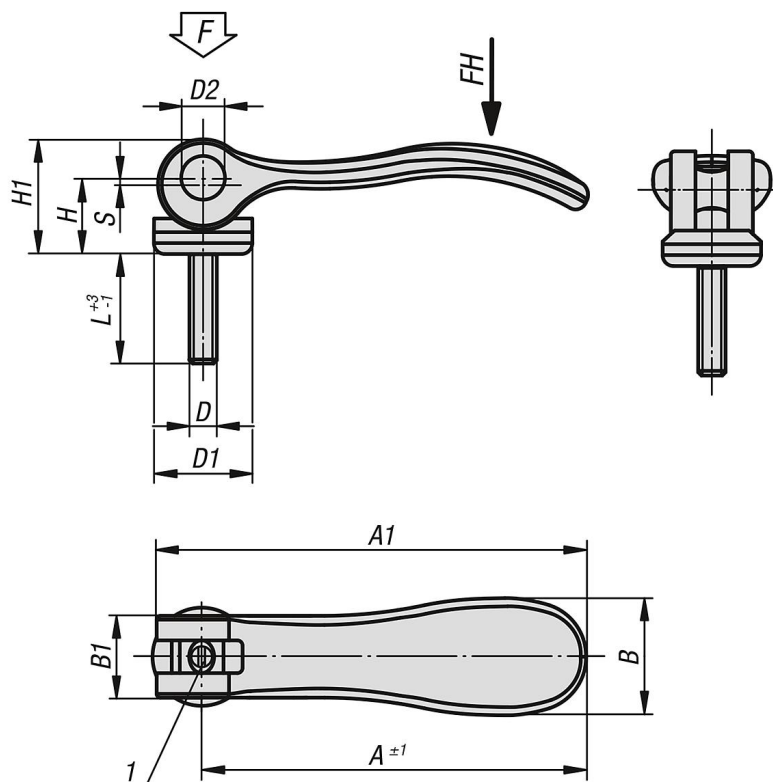

Cam levers, adjustable, external thread, steel

Cam levers, steel, adjustable with external thread, plastic thrust washer and steel stud - inch

Order No.	D	D1	D2	B	B1	H	H1	A	A1	L	Travel S	Clamping force F (kN)	Hand force FH N
K0789.15022A1X20	10-32	18,1	9	21,5	15	14,5	22	70,4	79,2	20	1,2	4	120
K0789.15022A1X30	10-32	18,1	9	21,5	15	14,5	22	70,4	79,2	30	1,2	4	120
K0789.15022A1X40	10-32	18,1	9	21,5	15	14,5	22	70,4	79,2	40	1,2	4	120
K0789.15022A1X50	10-32	18,1	9	21,5	15	14,5	22	70,4	79,2	50	1,2	4	120
K0789.15022A2X20	1/4-20	18,1	9	21,5	15	14,5	22	70,4	79,2	20	1,2	4	120
K0789.15022A2X30	1/4-20	18,1	9	21,5	15	14,5	22	70,4	79,2	30	1,2	4	120
K0789.15022A2X40	1/4-20	18,1	9	21,5	15	14,5	22	70,4	79,2	40	1,2	4	120
K0789.25022A3X25	5/16-18	27,1	11	33,2	24	18	28,5	96	108	25	1,5	8	350
K0789.15022A2X50	1/4-20	18,1	9	21,5	15	14,5	22	70,4	79,2	50	1,2	4	120
K0789.25022A3X30	5/16-18	27,1	11	33,2	24	18	28,5	96	108	30	1,5	8	350
K0789.25022A3X40	5/16-18	27,1	11	33,2	24	18	28,5	96	108	40	1,5	8	350
K0789.25022A3X50	5/16-18	27,1	11	33,2	24	18	28,5	96	108	50	1,5	8	350
K0789.25022A4X25	3/8-16	27,1	11	33,2	24	18	28,5	96	108	25	1,5	8	350
K0789.25022A4X30	3/8-16	27,1	11	33,2	24	18	28,5	96	108	30	1,5	8	350
K0789.25022A4X40	3/8-16	27,1	11	33,2	24	18	28,5	96	108	40	1,5	8	350
K0789.25022A4X50	3/8-16	27,1	11	33,2	24	18	28,5	96	108	50	1,5	8	350