

## Lateral spring plungers without seal, thrust pin POM, spring steel - inch

Item description/product images

INCH  
Parts**Description****Material:**

body in aluminum; spring in steel; pressure pin in plastic

**Version:**

body blue electro zinc-plated.

**Order information:**

For the inch series, dimension D and D2 are in inches, all other dimensions are in mm.

**Note:**

Lateral Spring Plungers are for positioning, clamping, holding and fastening of workpieces during engraving, labeling, drilling, reaming, tapping, honing, grinding, welding, soldering, tooling, assembling, etc.

Eccentric adjustment bushings see are also available.


Dimensions W and Z are customer specific.

**Drawing reference:**

1) assembly tool

## Lateral spring plungers without seal, thrust pin POM, spring steel - inch

### Drawings

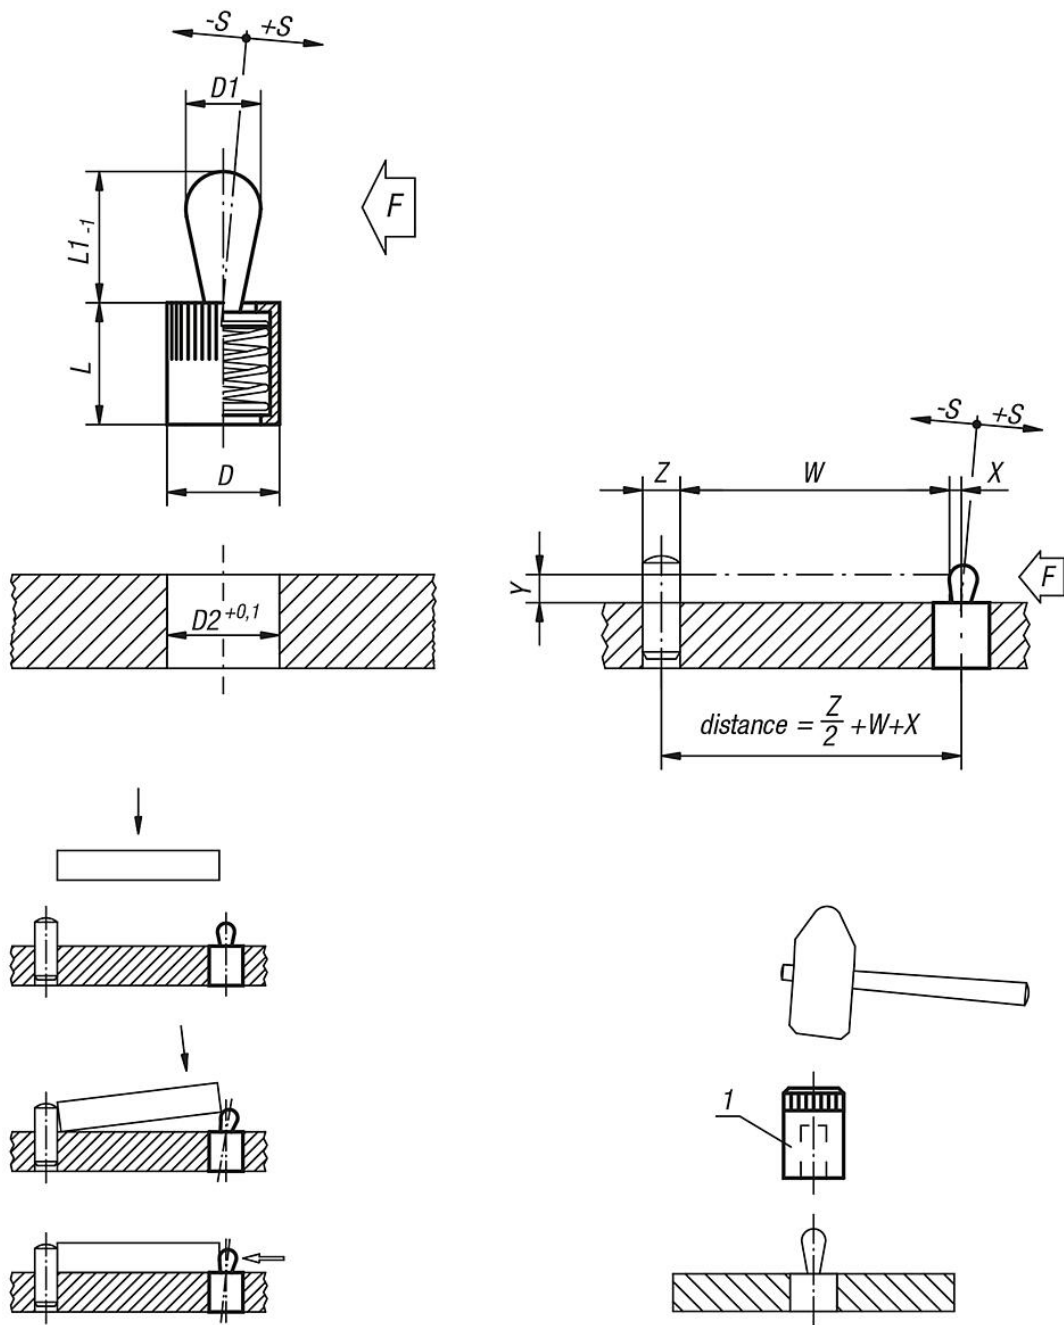

Item No.	D	D1	L	L1	D2	±S	F ca.N	X if Y = 1	X if Y = 2	X if Y = 3	X if Y = 4,5	X if Y = 6	X if Y = 8	Item No. installation tool
K0368.71034CM	1/4	3	7	4	1/4	0,5	10	0,8	1	1	1	1	1	K0369.03CM
K0368.71054CU	7/16	5	11	6,7	7/16	0,8	20	-	1,5	1,7	1,7	1,7	1,7	K0369.05CU
K0368.71064CU	7/16	6	11	10,7	7/16	1	40	-	-	-	1,7	1,9	1,9	K0369.05CU
K0368.71084CP	1/2	8	13	13,9	1/2	1,3	50	-	-	-	-	2,5	2,7	K0369.08CP
K0368.71104CQ	5/8	10	17	16,7	5/8	1,6	100	-	-	-	-	-	3,1	K0369.10CQ

