

Spring plungers with slot and thrust pin, standard spring force - inch

Item description/product images



INCH
Parts



Description

Material:

body 1.4305 (AISI 303 equivalent).
Thrust pin 1.4034 (AISI 420 equivalent).
Spring 1.4310 (AISI 301 equivalent).


Version:

Bright.
Thrust pin hardened.

Note:

For the inch series, dimension D is in inches, all other dimensions are in mm.

Drawings

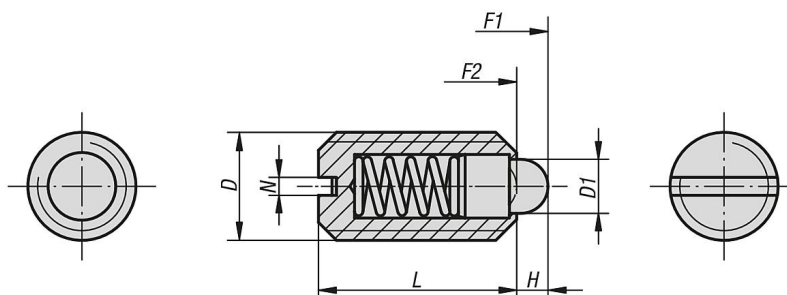

Order No.	Main material	D	D1	H	L	N	Spring force initial pressure F1 approx. N	Spring force final pressure F2 approx. N
K0314.AG	stainless steel	8-36	1,8	1,5	9	0,6	6	20
K0314.AE	stainless steel	8-32	1,8	1,5	9	0,6	6	20
K0314.A1	stainless steel	10-32	2,4	2	12	0,8	6	20
K0314.AJ	stainless steel	1/4-28	2,7	2	14	1	7	20
K0314.A2	stainless steel	1/4-20	2,7	2	14	1	7	20
K0314.A3	stainless steel	5/16-18	4	2	16	1,2	15	30
K0314.A4	stainless steel	3/8-16	4,5	2,5	19	1,6	20	35
K0314.A5	stainless steel	1/2-13	6	3,5	22	2	30	55
K0314.A6	stainless steel	5/8-11	8,5	4,5	24	2,5	45	100